


- NOTES:
- 1. SUBSTRATE:  
FUSED SILICA
  - 2. COATING (APPLY ACROSS COATING APERTURE):  
  
S1:  $R(AVG) \geq 98\%$  @ 340-488nm @ 0° AOI  
 $R(AVG) \geq 98\%$  @ 320-450nm @ 45° AOI FOR ALL POLARIZATION  
 $R(AVG) \geq 98\%$  @ 320-450nm @ 45° FOR S-POLARIZATION  
  
S2: NONE

3. FINE GRIND SURFACE

FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING

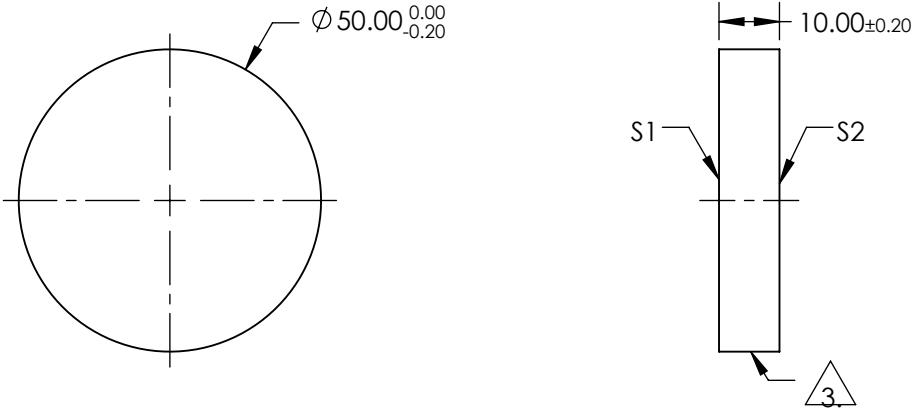

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	<div><div><div><div></div></div></div><div><div>Edmund Optics®</div></div></div>			
SHAPE	PLANO	PLANO				
CLEAR APERTURE	> 90	N/A	<div>THIRD ANGLE PROJECTION</div> <div></div>	TITLE	Ø50mm, 320 - 450nm BROADBAND λ/10 MIRROR	
SURFACE QUALITY	20-10	FINE GRIND				
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED				
			ALL DIMS IN	mm	DWG NO	37571
			SHEET 1 OF 1			