
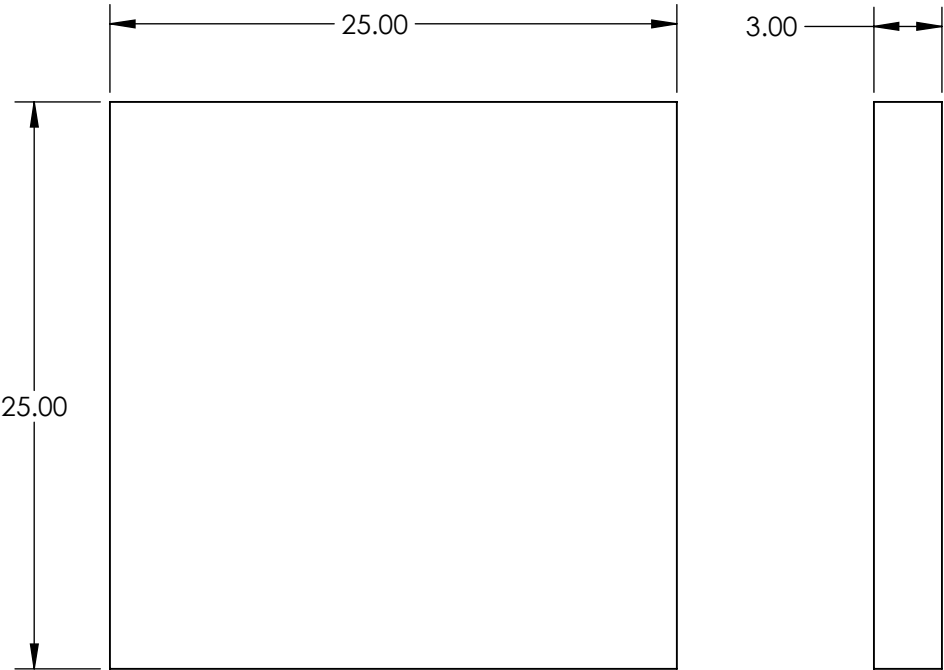


NOTES:  
1. SUBSTRATE:  
FUSED SILICA

2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs ≤1.0% @ 250 - 425nm  
Ravg ≤0.75% @ 250 - 425nm  
Ravg ≤0.5% @ 370 - 420nm



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	22.50 x 22.50	22.50 x 22.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE  
PROJECTION

ALL DIMS IN

mm

 Edmund Optics®

TITLE

25mm Sq., 3mm Thick, UV-AR Coated λ/10  
Fused Silica Window

DWG NO

24304

SHEET

9 OF 24